Reactancias para lámparas compactas
Ballasts for compact lamps

www.elt.es

AC 125V 50Hz 4W - 38W tw = 130ºC


EN-61347-2-8
EN-60921

Serie PLANA






Formato A
Format A

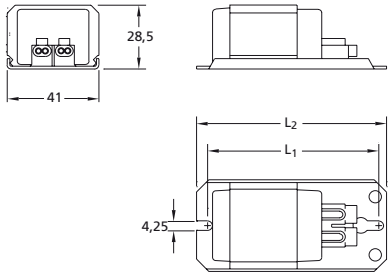

Formato B
Format B

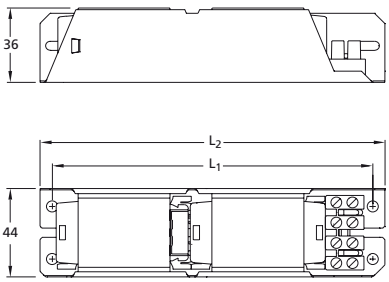


Tipo *Type*	Codigo *Code*	Lámpara *Lamp* Potencia *Power* W	Casquillo *Cap*	Corriente *Current* A	$\Delta t/\Delta t_{an}$ K	λ	Peso *Weight* Kg	Dimensiones *Dimensions* L_1 (mm)	L_2 (mm)	Esquema conexión *Wiring diagram nº*	Formato *Format*
AC1 04/12-SP-2	1111870	4 6 8	G5	0,170 0,160 0,153	50/80	0,39 0,47 0,58	0,330	74	85	1-2 1-2 1-2	A
AC1 09/12-SP-2		5 7 9	G23	0,180 0,175 0,170	40/65	0,44 0,49 0,53				6 6 6	
AC1 2/12-SP-2	1111290	18	2G11	0,370	40/95	0,55				7	
AC1 13/12-4		10 13 13	G24d-1 G24d-1 G5	0,185 0,165 0,165	55	0,58	1	158	170	8	B
AC1 18/12-4		18	G24d-2	0,220	55	0,45					
AC1 26/12-4 (*)		24 26	2G11 G24d-3	0,345 0,325	55	0,9 (4,5μF)					
AC1 4/12-4 (*)	1115990	36 38	2G11 GR10q	0,43 0,43	60/160	0,9 (5,5μF)					

~ Reactancias para incorporar. Uso interior.
~ Impregnadas al vacío en resina de poliéster.
~ Disponibles con clema de conexión rápida.
(0,5-1 mm2) o por tornillo (2,5 mm2).
~ Otros tipos bajo demanda.
~ Iguales dimensiones para tensiones de 110, 115, 120 ó 130v. y frecuencia de 60Hz.
(*) Es obligatorio el uso del condensador de compensación del factor de potencia.

~ Ballasts for built-in use. Indoor use.
~ Vacuum impregnated in polyester resin.
~ Available with push wire (0,5-1 mm2) or screw connection (2,5 mm2).
~ Further types on request.
~ Ballast of rated voltages 110, 115, 120, 130V or 60Hz of frequency have the same dimensions specified on the diagram.
(*) The use of the power factor compensation capacitor is obligatory.


Esquemas de conexionado
Wiring diagrams

1




INDUCTIVO
INDUCTIVE

2




COMPENSADO
COMPENSATED

6



7



8

