Reactancias para lámparas de Vapor de Mercurio


Ballasts for Mercury Vapour lamps


www.elt.es

VMI 230V 50Hz 50W - 1000W tw = 130ºC


EN-61347-2-9
EN-60923



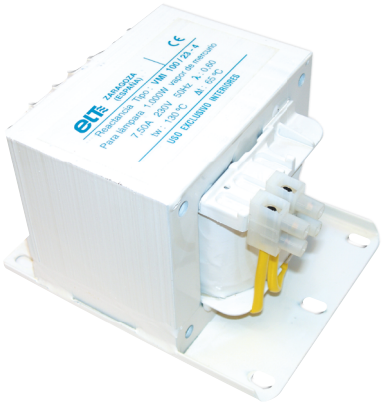

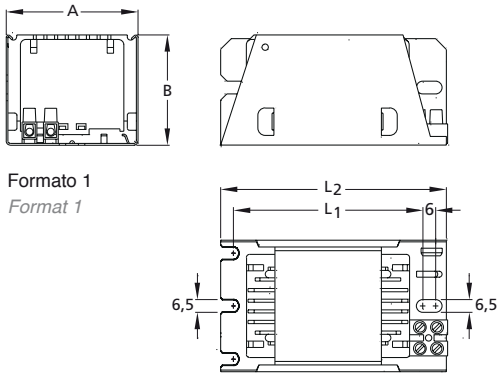

Formato 1
Format 1

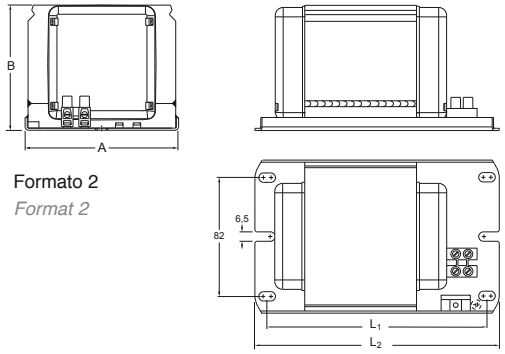

Formato 2
Format 2

Tipo *Type*	Codigo *Code*	Lámpara *Lamp* Potencia *Power* W	Lámpara *Lamp* Corriente *Current* A	Δt ºK	λ	Índice EEI EEI Index	Peso *Weight* Kg	Dimensiones *Dimensions* A	B	L_1	L_2	Esquema conexión *Wiring diagram nº*	Formato *Format*	Homologaciones en las reactancias *Approvals in the ballasts*
VMI 5/23-2	5112550	50	0,61	55	0,41	A3	1,20	62	52	85	106	1	1	-
VMI 8/23-2	5112430	80	0,80	60	0,50		1,25							
VMI 12/23-3	5112400	125	1,15	65	0,52		1,25							
VMI 25/23-3	5112410	250	2,13	70	0,55	A2	2,44	87	73	96	115			
VMI 40/23-3	5112424	400	3,25	65	0,57		3,43			116	135			
VMI 70/23-3	5112570	700	5,45	60	0,58		6,20	105	87	146+10	168		2	-
VMI 100/23-4	5112580	1000	7,50	65	0,60		9,04	130	106,5	141+12	170			

~ Reactancias para incorporar.
~ Impregnadas al vacío en resina de poliéster, que asegura un funcionamiento silencioso en condiciones normales.
~ Con bornera de conexión por tornillo, de 2,5 mm², 4 mm² y 10 mm² para las potencias hasta 125W, entre 250 y 700W y 1000W respectivamente.
~ Bajo demanda se pueden fabricar de otras tensiones y frecuencias.

~ Ballasts for built-in use.
~ Vacuum impregnated with polyester resin which ensures silent operation in normal conditions.
~ Available with 2.5 mm², 4 mm², and 10 mm² screw push wire connection for powers of up to 125W, between 250 and 700W, and 1000W respectively.
~ Further voltages and frequencies can be manufactured upon request.

Esquema de conexionado

Wiring diagram

1

