


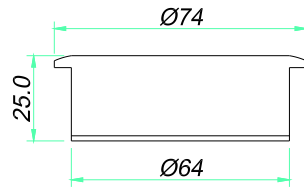
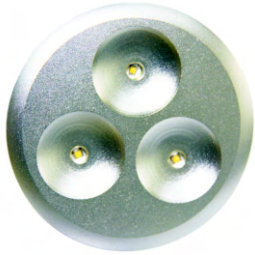
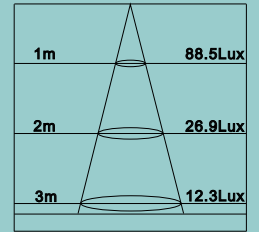



S60005
S60006




Installation drawing



Distance Luminance
S60005


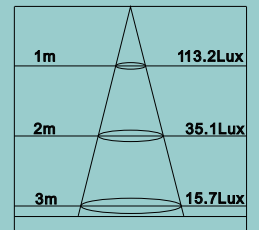


Distance Luminance
S60006

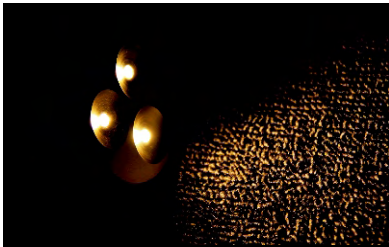


model number	color	LED	light output (lm)	beam angle	CRI	voltage (v)
S60005	white	Cree	213	140°	74.4	5-28
S60006	warm white	Cree	167	140°	82.1	5-28


S600012
S600013

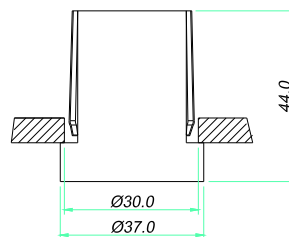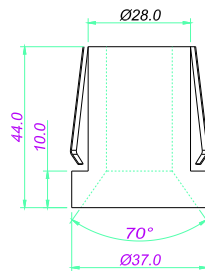


Installation drawing

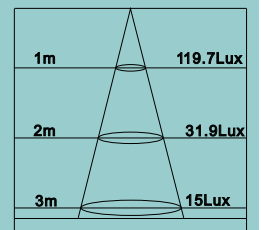

Distance Luminance
S600012



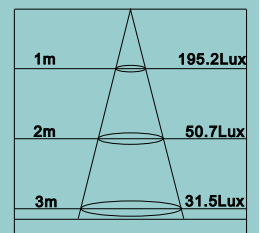


Distance Luminance
S600013


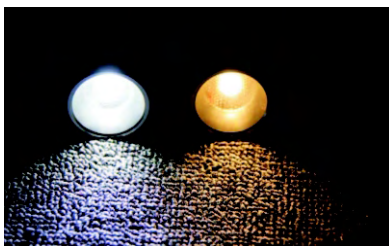


model number	color	LED	light output (lm)	beam angle	CRI	voltage (v)
S600012	white	Cree	72	38°	75.0	5-28
S600013	warm white	Cree	54	38°	83.7	5-28

S60019

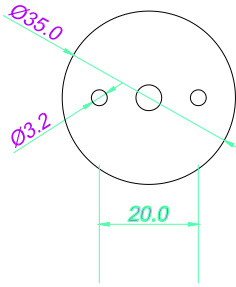

Installation drawing





S60019





model number	color	LED	light output (lm)	beam angle	CRI	voltage (v)
S60019	white	Cree	118	60°	76.1	5-28



S60024 S60025

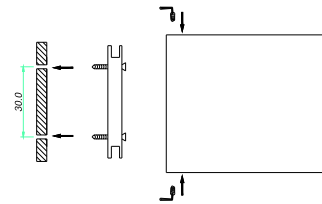

Installation drawing




S60024




S60025

model number	color	LED	light output (lm)	beam angle	CRI	voltage (v)
S60024	white	Cree	259	38°	74.8	5-28
S60025	warm white	Cree	201	38°	83.3	5-28

S60030
S60031

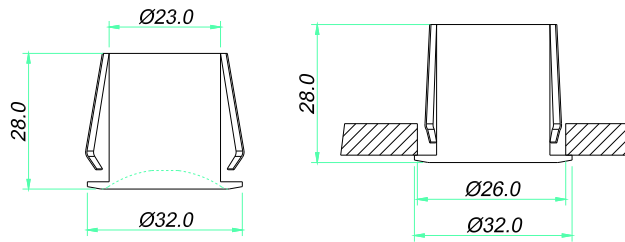

Installation drawing


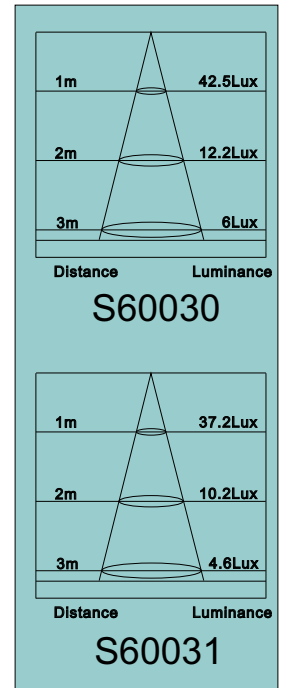


model number	color	LED	light output (lm)	beam angle	CRI	voltage (v)
S60030	white	Cree	74	140°	74.3	5-28
S60031	warm white	Cree	58	140°	82.5	5-28


S60036

S60043


S60050

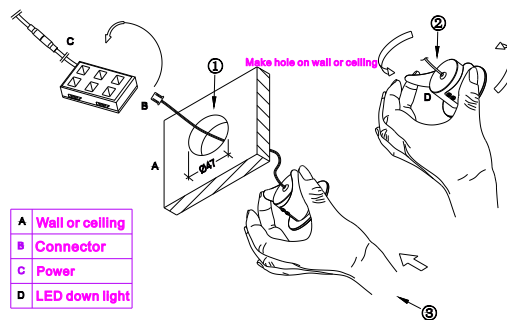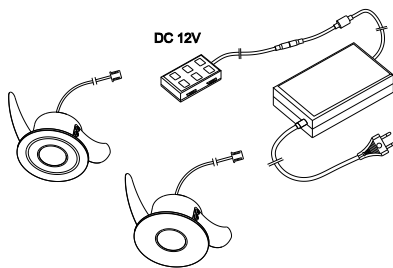

- A Wall or ceiling
- B Connector
- C Power
- D LED down light

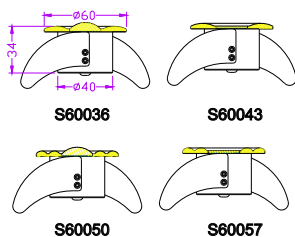

Installation drawing

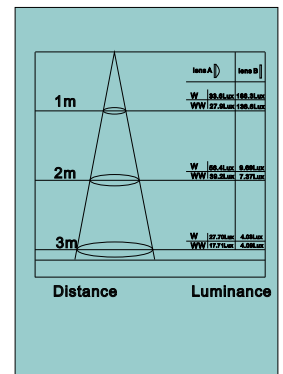

S60036	S60050
S60037	S60051
S60043	S60057
S60044	S60058

A stands for lens A, B stands for lens B.

