
FRIALEN®

FRIALEN®-Spigot Saddles with integral drill SAB

PE 100 SDR 11

Maximum working pressure 16 bar (Water) / 10 bar (Gas)



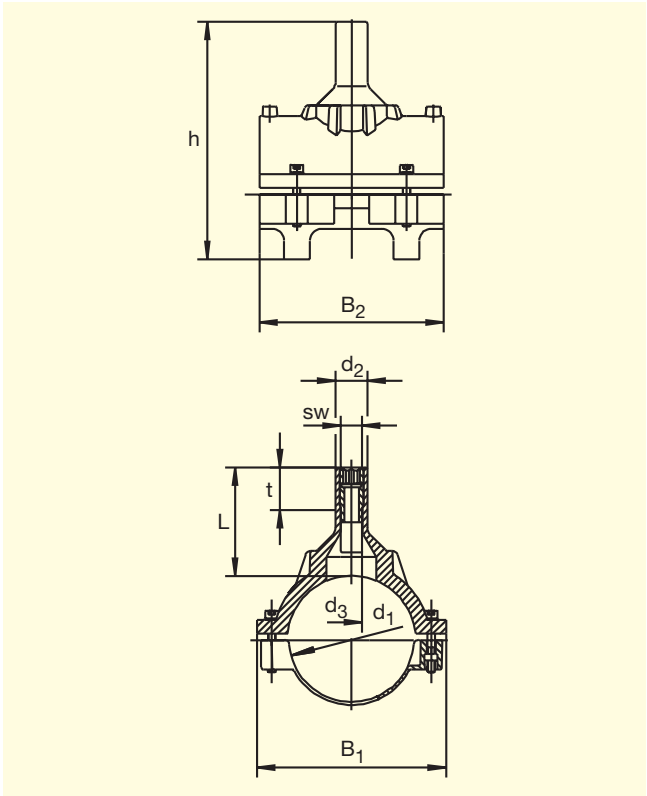

d_1	d_2	Order Ref.	Stock-status	VE	PE	d_3	L	h	t	B_1	B_2	SW	Weight kg/each
63*	32	T-615 091	1	20	360	21	100	171	42	108	118	17	0.408
90	32	T-615 092	1	20	160	21	89	193	42	155	150	17	0.762
110	32	T-615 093	1	12	96	21	109	233	42	175	180	17	0.972
125	32	T-615 094	1	12	96	21	109	248	42	190	185	17	1.030
160	32	T-615 095	1	6	48	21	109	283	42	225	195	17	1.204

FRIALEN®-Safety Fittings can be fused and tapped to pipes of SDR stages 11 to 17.6
*Saddle parts d 63 can only be fused to pipes of SDR stage 11.
DVGW-Registration-No.: DV-8606AU2249

Please turn over for important information regarding application of the
FRIALEN®-Spigot Saddles with integral drill SAB

FRIATEC

FRIALEN®-Spigot Saddles with integral drill SAB

PE 100 SDR 11

Maximum working pressure 16 bar (Water) / 10 bar (Gas)

Areas of Application

The FRIALEN®-Spigot Saddles with integral drill SAB are used for tapping in the depressurised state of gas and water pipes. Outlet spigot for use with FRIALEN®-couplers MB or UB.

Assembly Instructions

The fusion of the HDPE distribution pipes and the house connections with FRIALEN®-Spigot Saddles SAB takes place by FRIALEN®-fusing – leakproof and longitudinally strong.

The saddle and the outlet spigot have to be prepared according to the general installation instructions (see “Assembly Instructions” for “FRIALEN®-Safety Fittings for house connections and distribution pipes up to d 225”). This involves removing the oxide skin and cleaning the pipe covered by the saddle.

Seven good reasons for using the FRIALEN®-SAB

- **Compact construction**
- **HDPE saddle with exposed heating element for optimal heat transfer**
- **Tapping area free of heating wires**
- **Swarfless tapping with integral drill**
- **Preassembled unit without loose parts**
- **Extra wide fusion zone**
- **Additional barcode for tracing back the underground fitting (Traceability-Coding).**

Please find our datasheets for downloading on the internet at www.friatec.com

For further information, please call our FRIALEN®-customer service staff and specialist advisers.

FRIATEC Aktiengesellschaft · Technical Plastics Division
P.O.B. 71 02 61 · D-68222 Mannheim
Telephone +49 621 486-0 · Telefax +49 621 479196
www.friatec.de · E-Mail: info-frialen@friatec.de

FRIATEC
an Aliaxis company

2172e/3