
Schüco ASS 50.NI

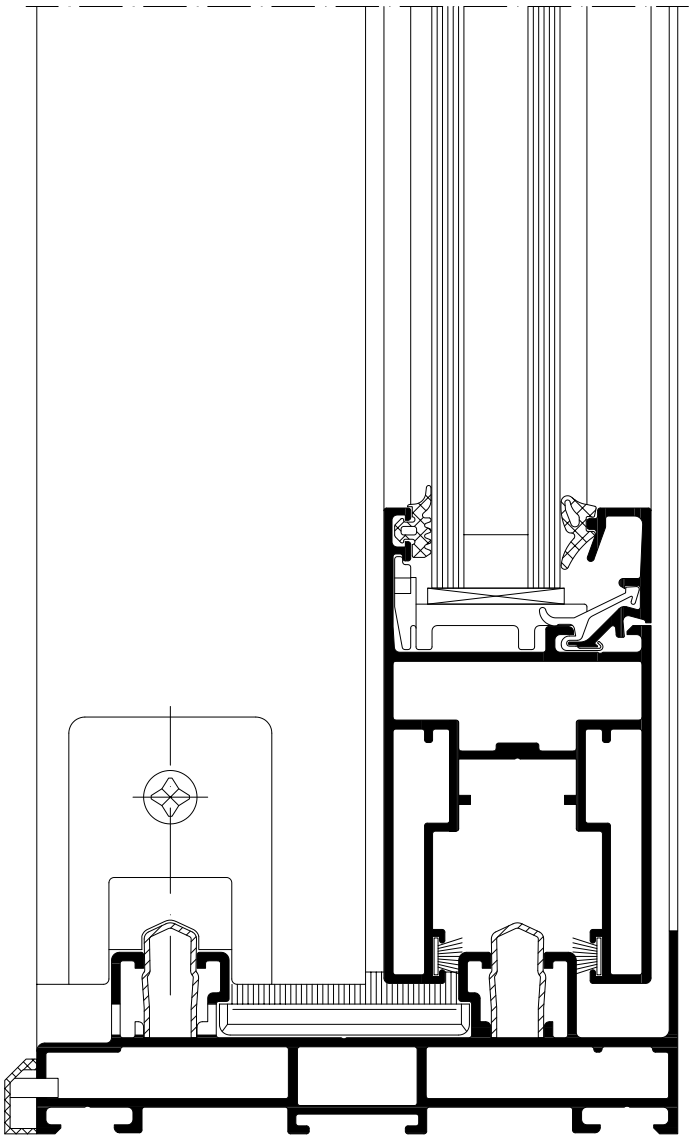

Detail verkleinert dargestellt
Detail shown smaller than actual size

Eigenschaften und Vorteile

- Ungedämmtes Schiebe- und Hebeschiebesystem, geringer Rahmenanteil, hoher Glasanteil
- Grundbautiefe Flügelprofil von 50 mm, Grundbautiefe Blendrahmenprofil von 120 mm
- Flaches Blendrahmenprofil als umlaufender Rahmen
- Blend- und Flügelrahmen werden umlaufend auf Gehrung gearbeitet
- Glasstärken von 8 mm - 32 mm einsetzbar
- Flügelgewichte bis 150 kg sind möglich
- Einbruchhemmend Klasse WK2 gemäß DIN V EN V 1627*
- Ausführung mit zwei Laufschienen
- Leiser und geräuscharmer Lauf der Schiebeelemente

Features and benefits

- *Non-thermally broken sliding and lift-and-slide system, proportionately less frame to more glass*
- *Basic depth of vent profile 50 mm. Basic depth of outer frame profile 120 mm*
- *Flat outer frame profile as continuous frame*
- *Outer and vent frames are mitre cut on all corners*
- *Glazing thicknesses of 8 mm - 32 mm can be used*
- *Vent weights up to 150 kg possible*
- *Burglar resistance class WK2 in accordance with DIN V EN V 1627**
- *Double track design*
- *Smooth, quiet operation of sliding units*

* je nach Ausführung
* *depending on the design*