Schüco AS PD 75.HI Performance Line

Systemprofile im Schüco-Verbund
System profiles, pre-rolled by Schüco

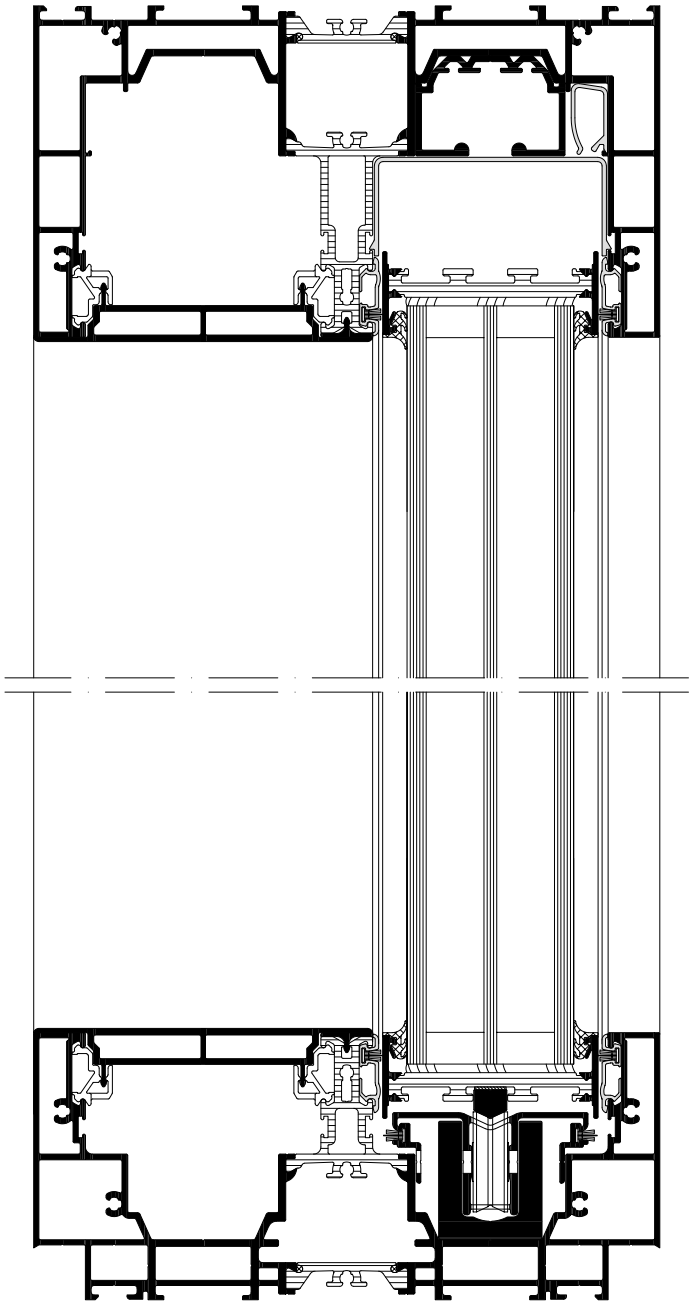


Abbildung verkleinert dargestellt.
Illustration shown smaller than actual size.

Eigenschaften und Vorteile

Schüco AS PD 75.HI TipTronic verbindet höchste Designansprüche mit einfachster und komfortabelster Bedienung. Große Schiebeflügel können einfach per Fingerwisch oder Sprachbefehl bedient werden. Die neue Generation der automatischen Panorama-Design Hebeschiebeanlagen bietet nicht nur die verdeckt liegende Montage aller Beschlagbauteile, sondern ist auch ein komplett geprüftes System aus Antrieb, Beschlag und Profilsystem - alles aus einer Hand.

- Der mechatronische Beschlag Schüco TipTronic bietet maximale Transparenz („Full-Panorama-Design“) und komfortabelste Bedienung
- Die Hebe-Schiebe-Technologie vereint erstmalig Full-Panorama-Design im geschlossenen- und eine barrierefreie Schwelle im geöffneten Zustand
- Individuelle Bedienbarkeit der Schüco AS PD 75.HI TipTronic
- Bedienung direkt am Element oder per Raumtaster
- Komfortfunktionen über Schüco Steuerungskomponenten (BSC)
- Bedienung per Smartphone mit der Schüco APP, oder auch per Alexa-Sprachbefehl
- Einfachste Einbindung in übergeordnete Gebäudeleittechnik über Schüco Gateways
- Flügelelemente können sowohl innen- und außenlaufend eingesetzt werden
- Sicherheitsklasse 3 durch den Software-Einklemmschutz
- Optionale Ausstattung mit Sicherheitssensoren, z.B. für öffentliche Bereiche (SK 4)
- Einfachste Montage aller mechatronischen Beschlagsbauteile und Berücksichtigung eines absolut minimierten Aufwandes für die Verkabelung. Es werden keine Kabelübergänge zwischen Flügel- und Blendrahmen benötigt
- Flügelgewichte bis zu 600 kg
- Öffnungsweite von bis zu 7 m Metern
- Einbruchhemmung bis RC 3

Features and benefits

Schüco AS PD 75.HI TipTronic combines the highest design standards with simple and convenient operation. Large sliding vents can be operated with a swipe of a finger or via voice command. This new generation of Panorama Design lift-and-slide systems not only offers the concealed installation of all fittings components, but is also a fully tested system consisting of a drive, fittings and profile system – all from a single source.

- *The mechatronic Schüco TipTronic fitting offers maximum transparency (full panorama design) and a convenient operation*
- *The lift-and-slide technology unites for the first time a full panoramic view when closed and a barrier-free threshold when open.*
- *Schüco AS PD 75.HI TipTronic can be operated individually*
- *Operation manually or via the wall-mounted switch*
- *Comfort functions via Schüco control components (BSC)*
- *Operation via smartphone with the Schüco app or via Alexa voice command*
- *Can be easily connected to the master building management system via Schüco Gateways*
- *Vent units can run internally or externally*
- *Security class 3 thanks to the finger-trap protection software*
- *Can be fitted with security sensors, e.g. for public areas (security class 4)*
- *Easy installation of all mechatronic fittings components and minimum work required for cabling. No cable link connectors are required between vent frame and outer frame*
- *Vent weights up to 600 kg*
- *Opening widths up to 7 m*
- *Burglar resistance up to RC 3*