Reactancias para lámparas de alta emisión.
Arranque rapido. Alto factor de potencia. Protegidas IP-53


Ballasts for high output fluorescent lamps.
Rapid start. High power factor. IP-53 protection

www.elt.es

AR 230V 50Hz 60W - 105W Alta emisión (HO) tw = 120ºC

ANSI C 82.1



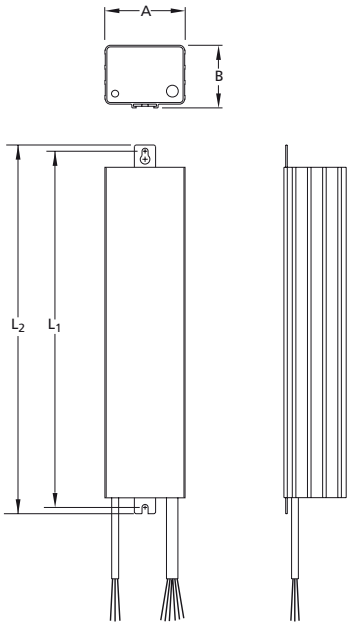

Tipo *Type*	Codigo *Code*	*Línea Line*		Lámpara *Lamp*			λ	Peso *Weight* Kg	Dimensiones *Dimensions*				Esquema conexión *Wiring diagram nº*
		Tensión *Voltage* V	Corriente *Current* (±10%)[A]	Potencia *Power* W	Casquillo *Cap*	Corriente *Current* A	±0,05		A (mm)	B (mm)	L_1 (mm)	L_2 (mm)	
SR1 60/23		230	0,37	60	R17d	0,80	0,90	2,00	67,2	61,2	217	240	27
AR2 6/23-5	4220601		0,68	2x60 1x85			0,95	7,05	90	70	353	376	26 25
AR2 8/23-5	4220591		0,95	2x85 1x105									26 25
AR2 10/23-5	4220581		1,20	2x105				7,17					26

~ Reactancias para exterior. Posición vertical. (montar en pantalla metálica puesta a tierra).
~ Impregnadas al vacío en resina de poliéster.
~ Envolvente de aluminio anodizado.
~ Encapsuladas en resina de poliuretano.
~ Conexiones de salida con cable de PVC 450/750V, 1 mm².
~ Otros tipos bajo demanda.

En caso de centralización, consultar a nuestro servicio técnico.


~ Ballast for outdoor use. Vertical place position. (Incorporated into earth-connected metallized back plate).
~ Vacuum impregnated in polyester resin.
~ Case in anodized aluminium.
~ Filled with polyurethane resin.
~ Connections by PVC 450/750V, 1 mm² double insulated cables.
~ Further types on request.

For cabinet-centralization, please consult our technical service.


Esquemas de conexionado

Wiring diagrams

25



26



27

