

U/UTP CAT6A E1 4PR LSZH



Jetlan6A

STANDARDS

IEC 61156-5
EN 50288-10-1
EN 50173
ISO/IEC 11801
EN 50575
EN 50399
EN 13501-6

APPLICATIONS

10BASE-T (IEEE 802.3)
4/16 Mbps TOKEN RING (IEEE 802.5)
100BASE-VG-AnyLAN
100 Mbps TP-PMD (ANSI X3T9.5)
100BASE-T (IEEE 802.3)
55/155 Mbps ATM
1000BASE-T (Gigabit Ethernet)
1.2 / 2.4 Gbps ATM
10G BASE-T

REACTION TO FIRE

Class: D_{ca}-s2,d2,a1
(according to EN 13501-6)

COLOUR CODES

Pairs Colours
1 Light Blue / Blue
2 White / Orange
3 Light Green / Green
4 Light Brown / Brown

Outer sheath colour:

- White [WH] - D_{ca}

PART NUMBER/PACKAGING

D_{ca}: 60095021 – Reels 500m [WH]
D_{ca}: 60095022 – Reels 1000m [WH]

OTHER CHARACTERISTICS

Storage Temperature -20°C to 70°C
Operating Temperature -20°C to 70°C
Laying Temperature -5°C to +5°C
(recommendation: between -5°C and +5°C,
prior storage 24h at 20°C)

Note: DATA cables are not suitable for
low impedance applications as: heating,
lighting, etc...

CONSTRUCTION


- 1 – Conductor: 23 AWG, Solid Bare Annealed Copper
- 2 – Insulation: Polyolefin Foam-Skin
- 3 – Formation: Varying short pair lay-length (4 pairs)
- 4 – Cross Filler
- 5 – NEXT Encapsulated Barrier
- 6 – Sheath: LSZH material

ELECTRICAL AND DIMENSIONAL CHARACTERISTICS

Max. dc resistance (Ω/km) @20°C: 95,0
Nom. mutual capacity (nF/km) @1kHz: 56
NVP (% of light speed): 70
Mean input impedance (Ω): 100 ± 5 @ 100MHz
Propagation delay (ns@10MHz): max. 518
Delay skew (ns/100m): max. 40
Coupling Att dB (min.):

- @30-100MHz 55
- @100-1000MHz 55-20log(f/100)

Max. pulling tension (N): 80
Min. bending radius: 4x outer diameter

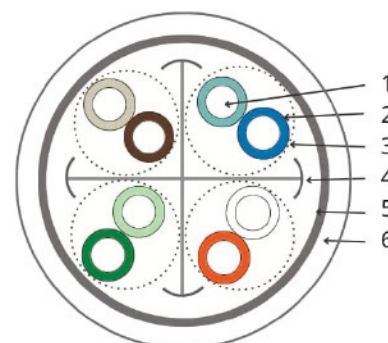

Not at scale

EuroClass	Approx. outer diameter (mm)	Approx. weight (kg/km)
D _{ca}	7,5	49,5

TRANSMISSION CHARACTERISTICS

Freq MHz	IL dB/100m (max.)	NEXT dB (min.)	PS-NEXT dB (min.)	ELFEXT (ACR-F) dB/100m (min.)	PS-ELFEXT (PSACR-F) dB/100m (min.)	ACR (dB/100m) (min.)	PS-ACR dB/100m (min.)	RL dB/100m (min.)
1*	2,1	75,3	72,3	68,0	65,0	73,2	70,2	20,0
4	3,8	66,3	63,3	56,0	53,0	62,5	59,5	23,0
10	5,9	60,3	57,3	48,0	45,0	54,4	51,4	25,0
16	7,5	57,2	54,2	43,9	40,9	49,8	46,8	25,0
20	8,4	55,8	52,8	42,0	39,0	47,4	44,4	25,0
31,25	10,5	52,9	49,9	38,1	35,1	42,4	39,4	23,6
62,5	15,0	48,4	45,4	32,1	29,1	33,4	30,4	21,5
100	19,1	45,3	42,3	28,0	25,0	26,2	23,2	20,1
125	21,5	43,8	40,8	26,1	23,1	22,3	19,3	19,4
200	27,6	40,8	37,8	22,0	19,0	13,2	10,2	18,0
250	31,1	39,3	36,3	20,0	17,0	8,3	5,3	17,3
300*	34,3	38,1	35,1	18,5	15,5	3,9	0,9	17,3
500*	45,3	34,8	31,8	14,0	11,0	---	---	17,3
600*	50,1	33,6	30,6	12,4	9,4	---	---	17,3

* For information only.
Note: Insertion loss values for 20°C.