

Limitadores de Velocidad / Speed Governors

CARACTERÍSTICAS GENERALES / GENERAL SPECIFICATIONS

- Moderno y eficiente diseño, con homologación Europea.
 - Eje montado sobre cojinete autolubricado (LV-11) o rodamiento (LV-300).
 - Disponible en múltiples ejecuciones para accionamiento hidráulico/eléctrico.
 - Con/sin garantía de pruebas, con/sin vigilancia de revoluciones, con/sin finales de carrera.
 - Optimizados para velocidades s/ISO-4190. Otras velocidades disponibles.
 - Velocidades de disparo s/EN-81 y s/TRA-400.
- Modern and efficient design, having European Type Test Certificate.
 - Axle mounted on self-lubricating sleeve bearing (LV-11) or roller bearing (LV-300).
 - Available in different configurations for either hydraulic and traction drives.
 - With/without testgroove, with/without RPM supervision, with/without limit switches.
 - Optimized for speeds according to ISO-4190. Other speeds available.
 - Tripping speed according to EN-81 and TRA-400.

Tabla de Aplicación / Applicational Chart

VELOCIDAD NOMINAL / NOMINAL SPEED m/s	0,63	1,00	0,80	1,00	1,20	1,60	2,00	2,50
VELOCIDAD DE DISPARO /TRIPPING SPEED m/s	0,88	1,40	1,12	1,40	1,60	2,00	2,50	
FUERZA DE ACTUACIÓN / TRIPPING FORCE daN	80		120					
TIPO / TYPE	LV-11		LV-300					
DIÁMETRO POLEA-CABLE / PULLEY-ROPE DIAMETER m/m	200/6		300/6-8					

EXTRAS / OPTIONS

GARGANTA DE PRUEBAS / TEST GROOVE	INCLUIDO / INCLUDED		X	X	X	X	X	X
FINALES DE CARRERA / LIMIT SWITCHES	X	X	X	X	X	X	X	X
LIMITADOR INFERIOR / GOVERNOR BELOW	X	X	X	X	X	X	X	X
BASE DE CHAPA / STEEL PLATE BASE	---	---	X	X	X	X	X	X
DISPARO ELÉCTRICO / ELECTRICAL PRETRIPPING	---	---	X	X	X	X	X	X

Notas:

Este documento es sólo informativo y puede representar equipos opcionales. En cada caso, deben dirigirse a la oferta concreta.

Debido a las continuas mejoras en los productos, nos reservamos el derecho de aportar modificaciones sin previo aviso.

Para otras velocidades y ejecuciones especiales, consulten nuestro catálogo técnico

Notes:

This document is only for information and may represent optional equipment. In each case, please refer to the specific offer.

Following our policy of continuous improvement, we reserve the right to add modifications without previous notice.

Consult technical catalogue for other speeds and special versions.

ThyssenKrupp Elevadores


C/ Cifuentes, s/n
28021 Madrid (España)
Tel.: 913 79 63 00
Fax: 913 79 64 39
comercial.tb@thyssenkrupp-gtki.com




ThyssenKrupp

LIMITADORES DE VELOCIDAD / SPEED GOVERNORS

LV - 11

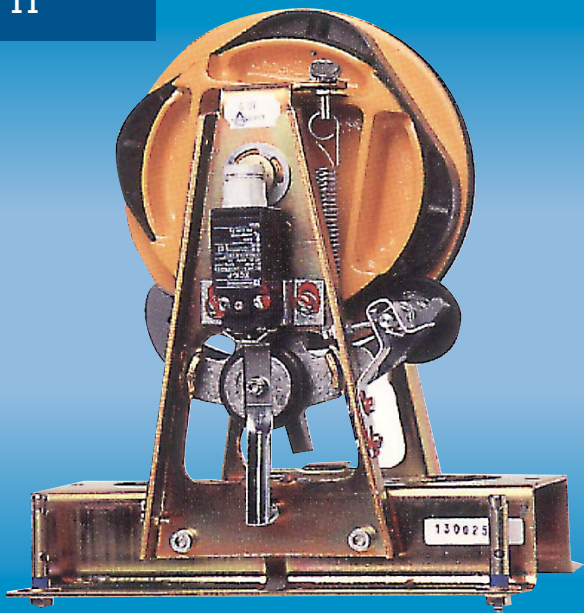

LV - 300

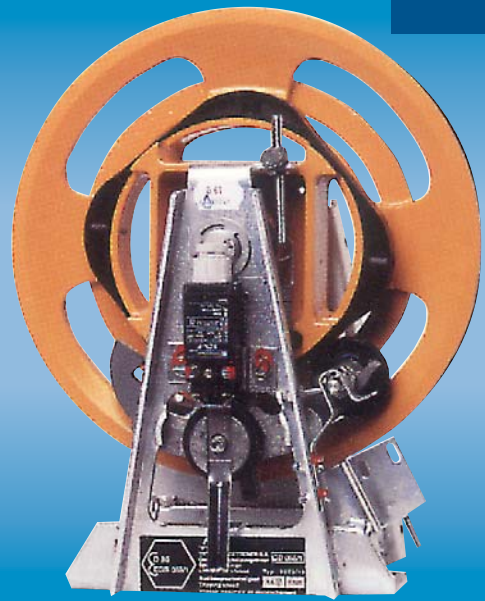

Polea Tensora
Tension Pulley

